



Flow-Tank DFG



Accessories

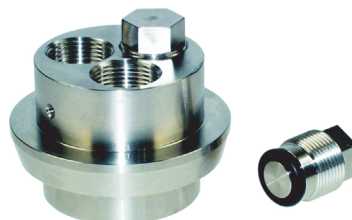

Lid with 3 x PG13.5 process connections and blind gland VS


Characteristics

For continuous analysis measurement with pH-, ORP-cells in liquid media with installation length of max. 120 mm.

Technical data

Material	: stainless steel 1.4571
Process pressure	: max. 16 bar
Operating temperature	: max. 140 °C
Process connection	: PG 13.5, G ¼ B or G1A
Inlet-, outlet	: clamping sleeve for pipes 10x2 mm
Tank diameter	: 54 mm

Dimensions

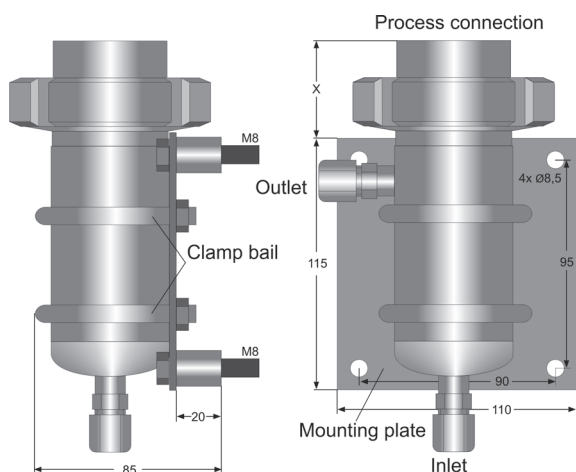

Ordering code

DFG - 1. - 2. - 3.

1. Model	
50	measuring tank D=54 mm
2. Process connection	
1 x PG13.5	*X = 45 mm
3 x PG13.5	*X = 45 mm
3 x G ¼ B	*X = 45 mm
1 x G 1 A	*X = 27 mm
3. Options	
00	without option
Accessories	(stainless steel 1.4571)
MP50	mounting plate incl. Mounting parts
RSB50	2 clamp bails incl. Bolt nuts
VS PG13,5	blind glands PG13.5